

**Bälz-electrodyn - control valves and control actuators**

**23.2 Actuator baelz 373-P22**

**Text for quotations + orders:**

**Linear pneumatic actuator**

**baelz 373-P22-6-Fo-S21**

6 springs on the top, pushing by the spring force and pulling by the compressed air

for spindle diameter : 10 mm

stroke max. : 40 mm

diaphragm : NBR

ambient conditions : 0...70°C, 0-90% r.F.


weight approx. : 6.6 kg

necessary compressed air pressure : 3 bar

Extra charges:

**damping container for water** D21 without response throttle

**damping container for water** D21/1 with response throttle

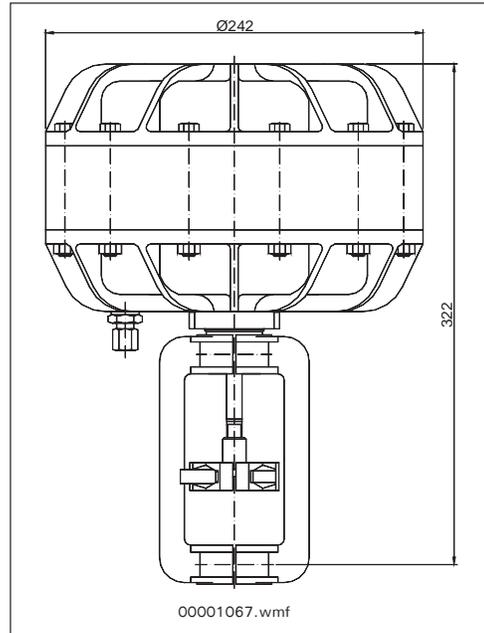

**Fig. 241**  
actuator baelz 373-P22-S21



**Fig. 242**  
actuator baelz 373-P22